


DOUBLE 620

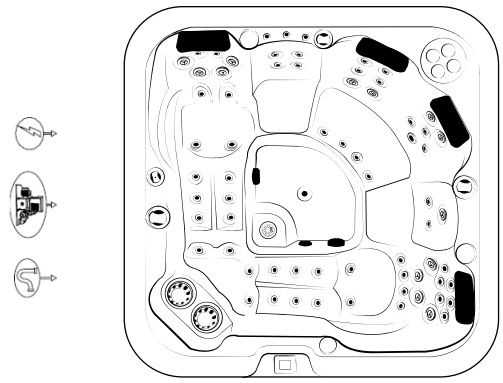

TECHNICAL INFORMATION

Dimensions	2.30 x 2.30 x 0.95 m
Shell	Coril® / White or Sterline Silver
Panels	Alupanels
Weight without water	450 Kg
Weight with water	2.250 Kg
Volume	5.1m ³

EQUIPMENT SPECIFICATIONS

Seats	6 (2 lounged)
Filter	2 (3.25 m ²)
Water Capacity	1800 l
Drain Valve	1


TECHNICAL SPECIFICATIONS

TECHNICAL SPECIFICATIONS	DELUXE
Jets	75
Circulation Pump	1 – 60 W
Massage Pump	2 – 2200w
Blower	1 – 850 W
Disinfection system	UV & Ozone
Control box with heater	1 – 3000 W
Illumination	Multipoint

ELECTRICAL SPECIFICATIONS

Voltage	220-240 V ~ or 380-415 V ~
Max Absorbed Power	5310 W
Frequency	50 Hz
Amperage	25A or 3x16A

Note : the standard measures may vary ±2cm

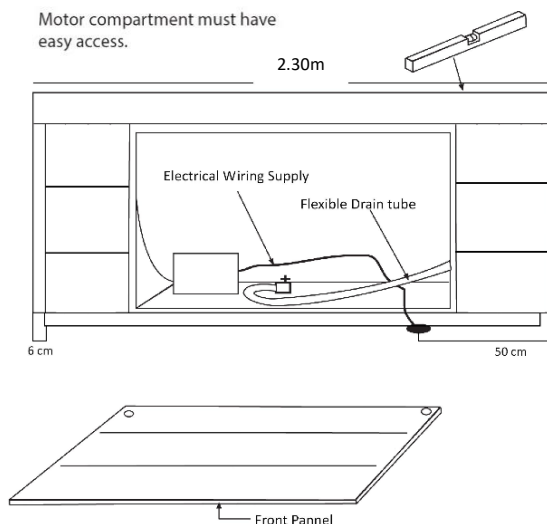

IMPORTANT: Important: The equipment must be connected to an exclusive and permanent power line capable to support installed power. Lighting and electrical receptacles must be located at least 1.5 meters from the equipment.

The circuit ground wire must be provided to take advantage of the designed-in safety features of the equipment.

The electric installation must be in accordance with actual legislation.