
HOT TUB COMFORT FAMILY 220










HOT TUB COMFORT FAMILY 220

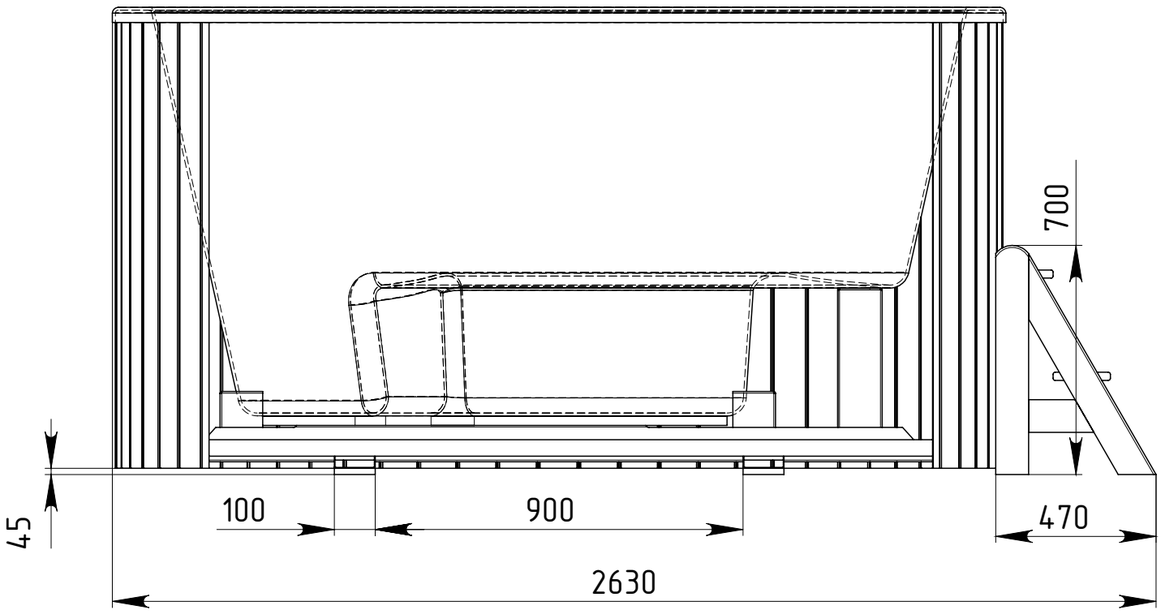

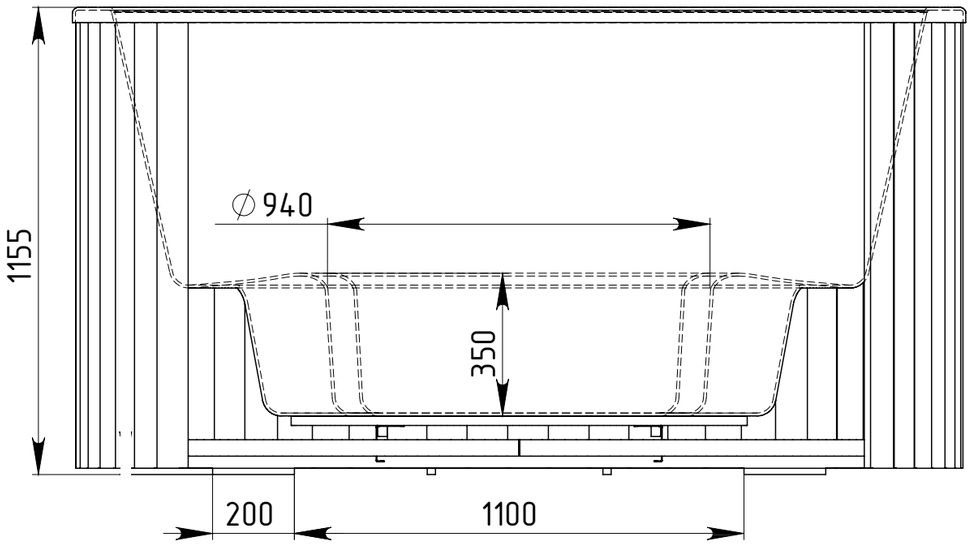


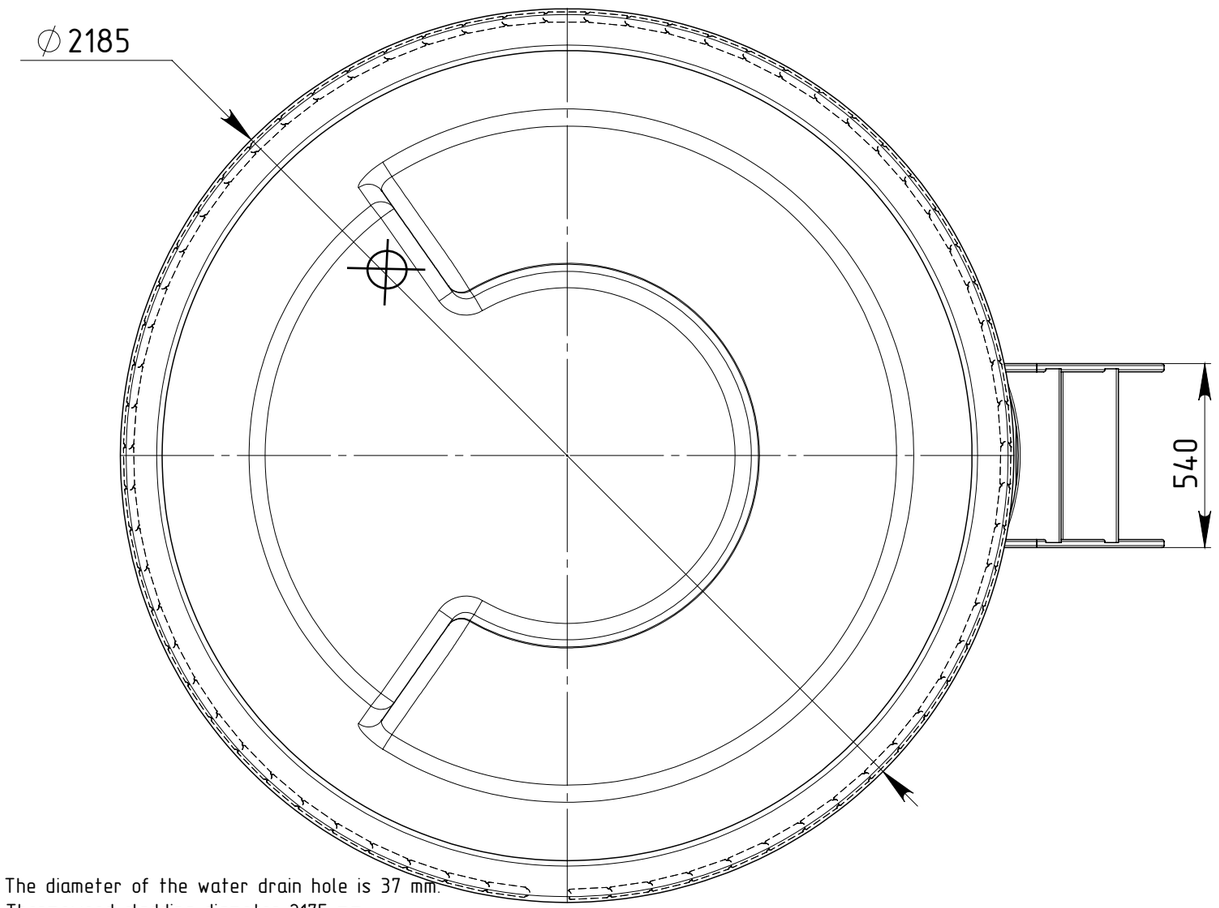


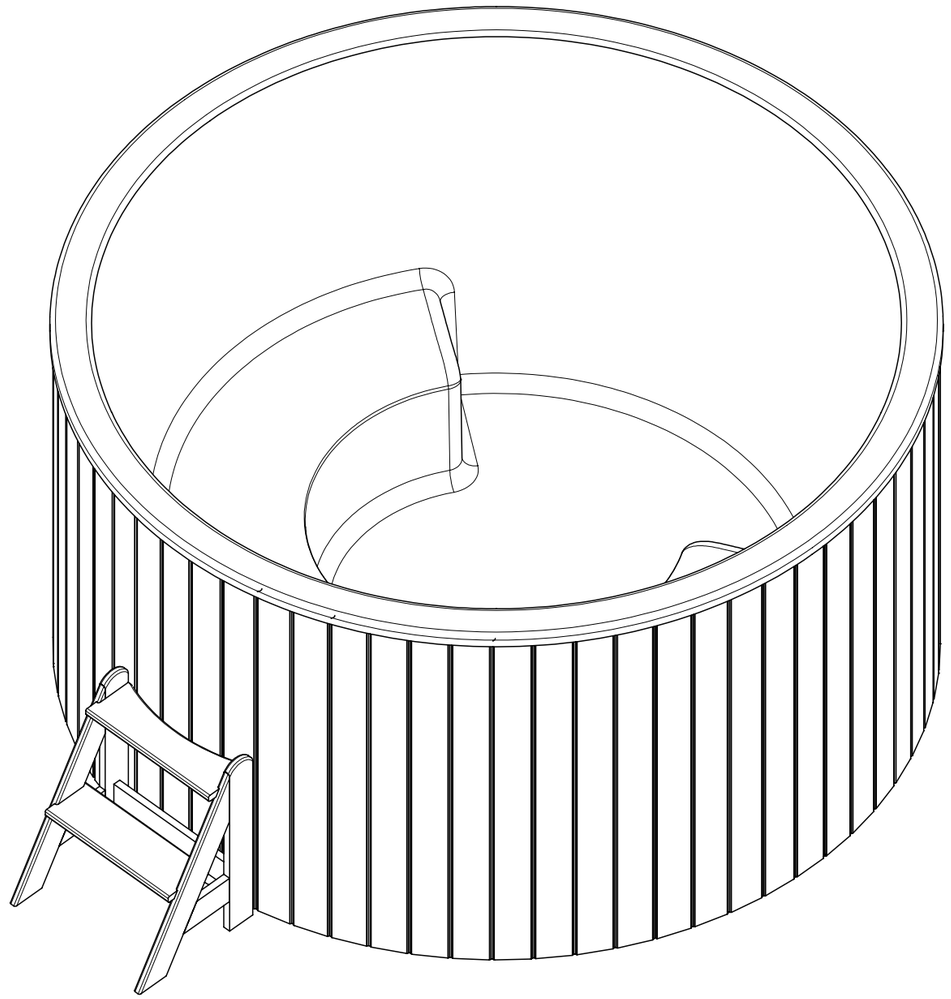


1. The diameter of the water drain hole is 37 mm.
2. Thermowood cladding diameter 2175 mm.
3. The hot tub kit includes a 3-step staircase.
4. The hot tub can be equipped with a 40 kW stove, with chimney.


METAL FRAME COMFORT FAMILY 220

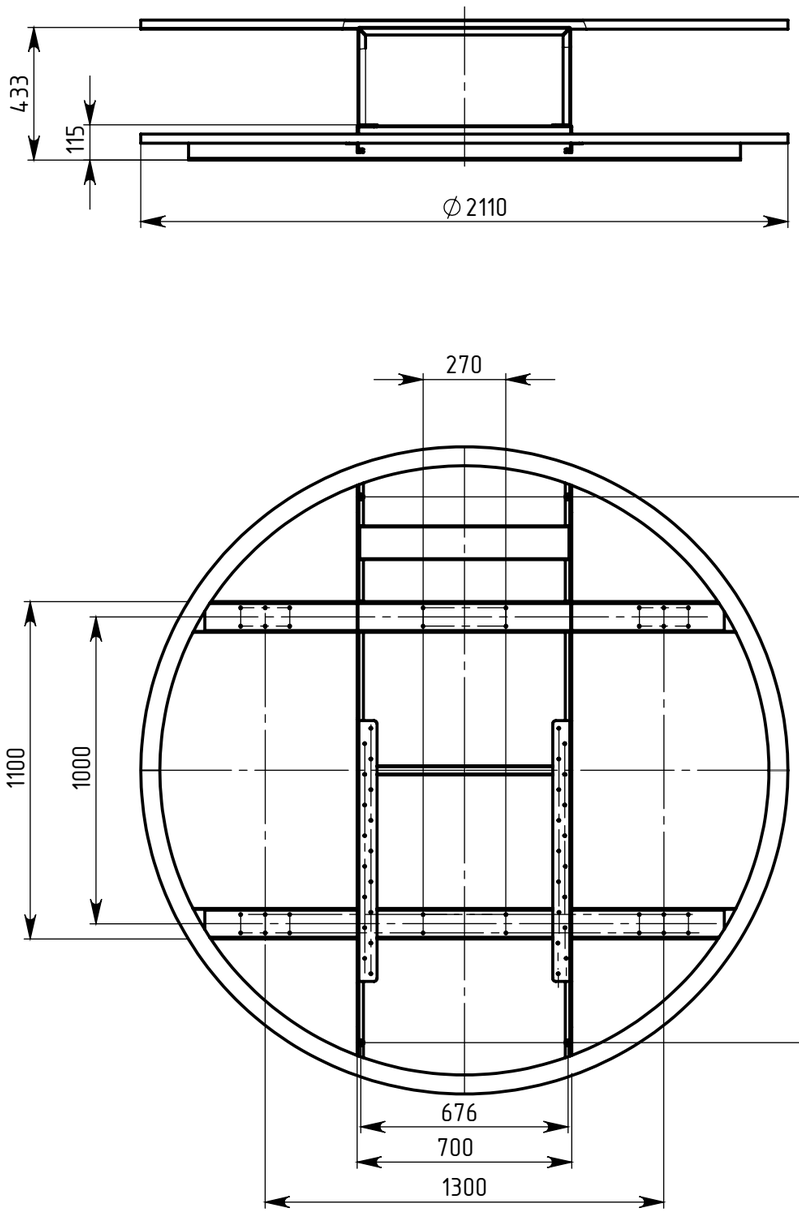


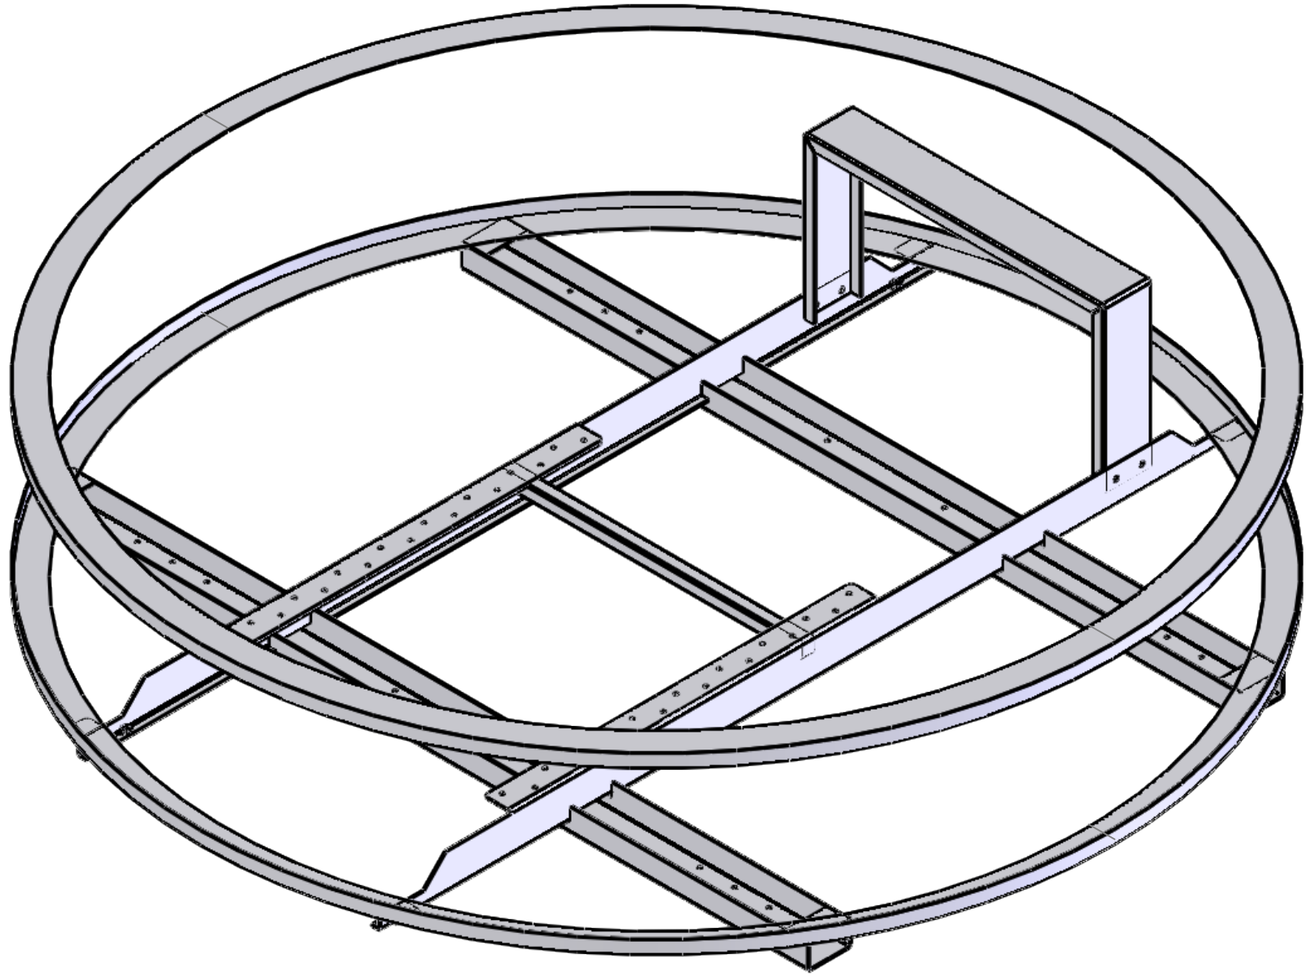

EXTERNAL STOVE 40 kW

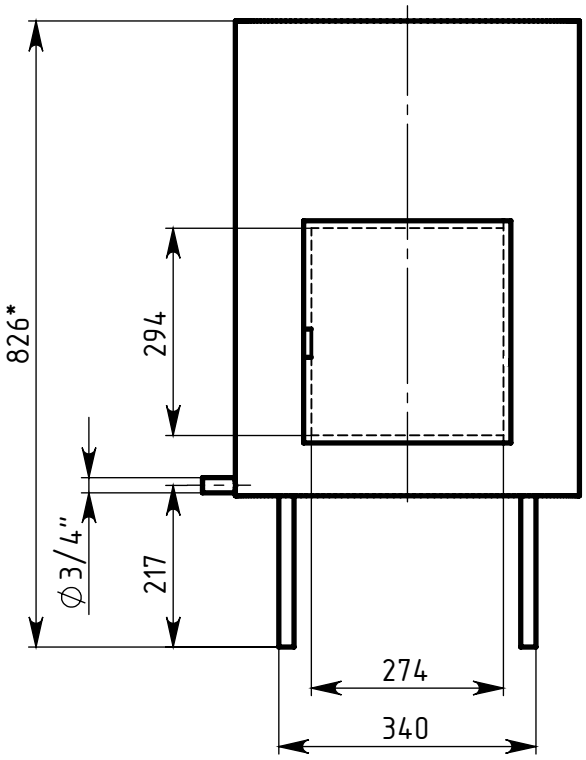

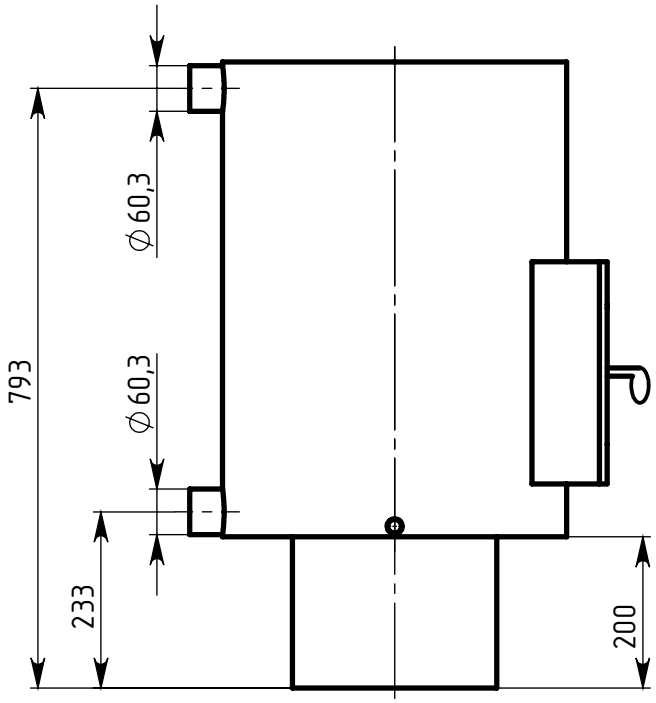

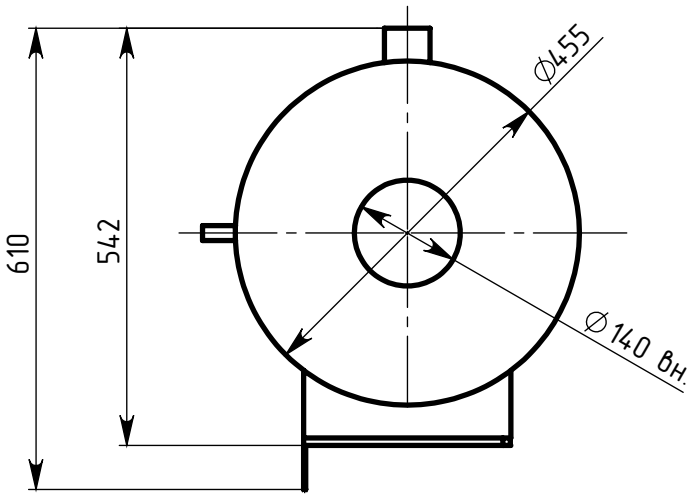

EXTERNAL STOVE 40 kW WITH CHIMNEY



Cap
200mm x 150mm

Chimney
140mm x 1000mm (2 pcs.)

Thermal protection
200mm x 1000mm

External stove
diameter 455mm, 826mm


Total height of the chimney with stove 2850 mm

Staircase for hot tub, thermo pine (light)



Width: 470 mm
Length: 540 mm
Height: 700 mm

Foundation plan for installing
COMFORT FAMILY 220 COLD (support surfaces)

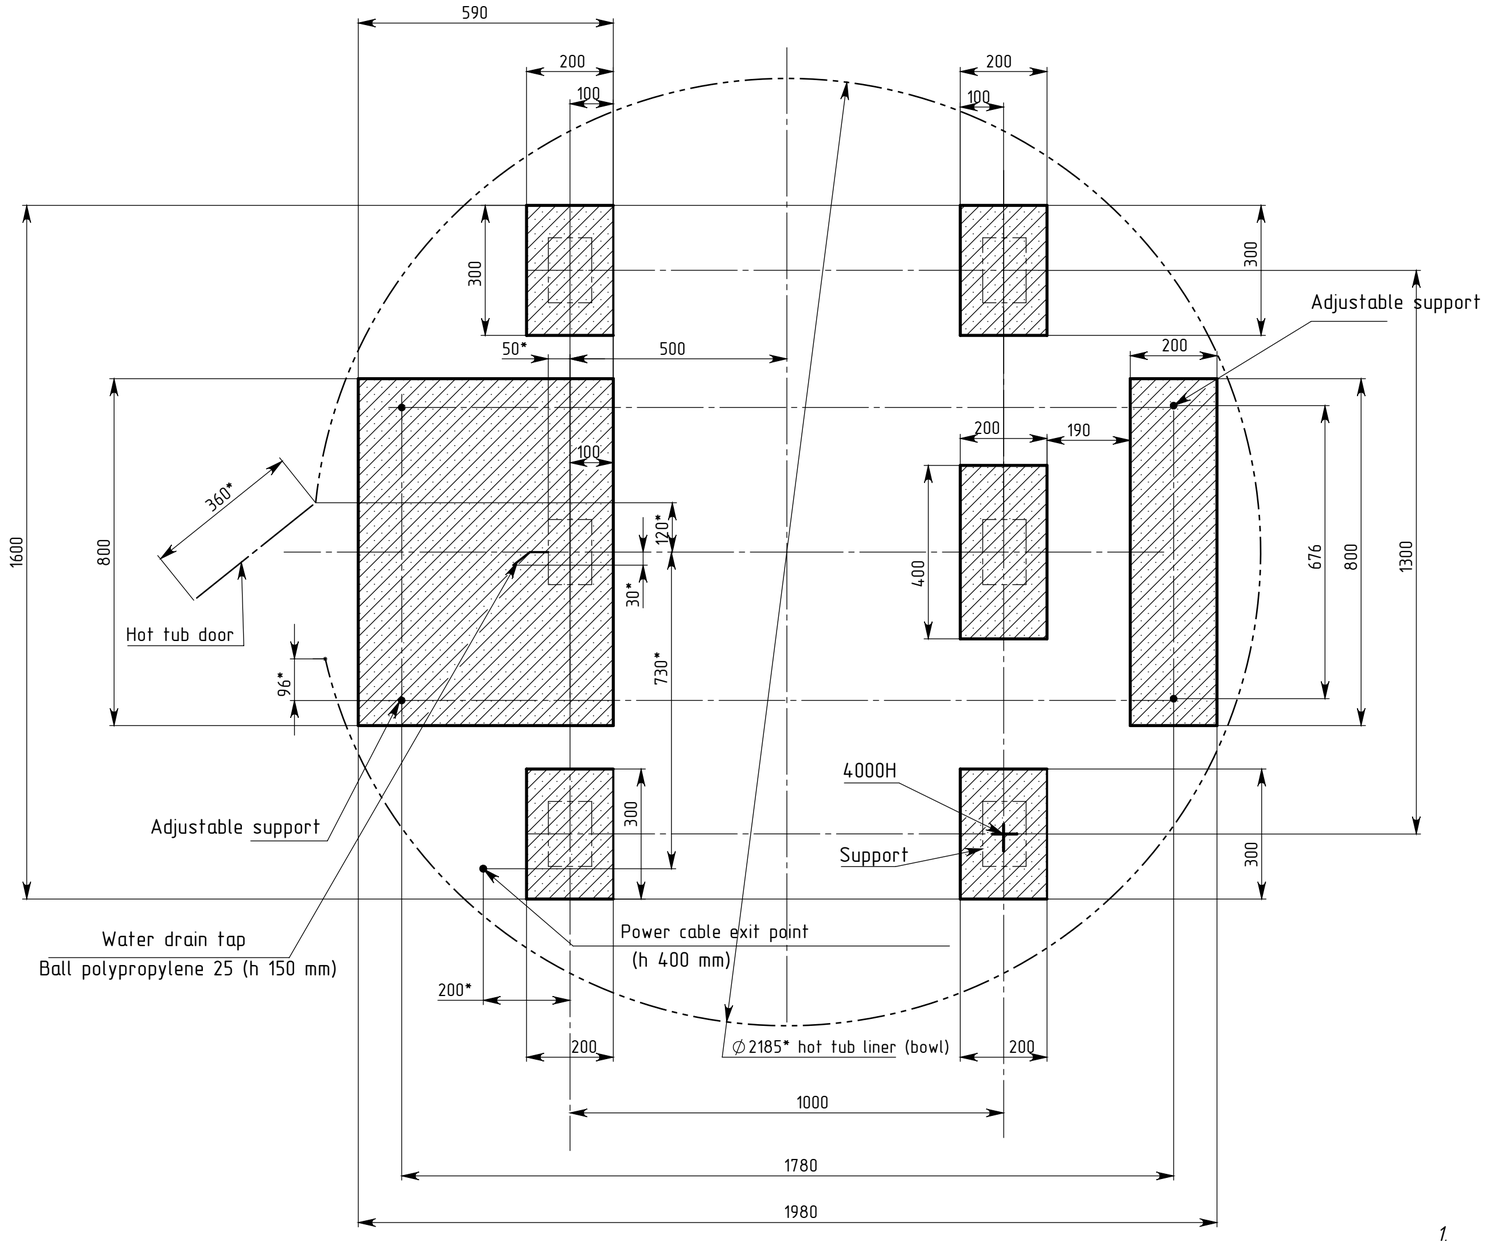


Support load	Weight, kg
Hot tub	250
Water	1650
Peopleu	500
General	2400
For 1 support, 4	

(

1. **Dimensions for reference.*
2. *Diameter of the drain hole is 37 mm∅*

Foundation plan for installing COMFORT FAMILY 220 HOT TUB WITH EXTERNAL STOVE 40 kW (support surfaces)

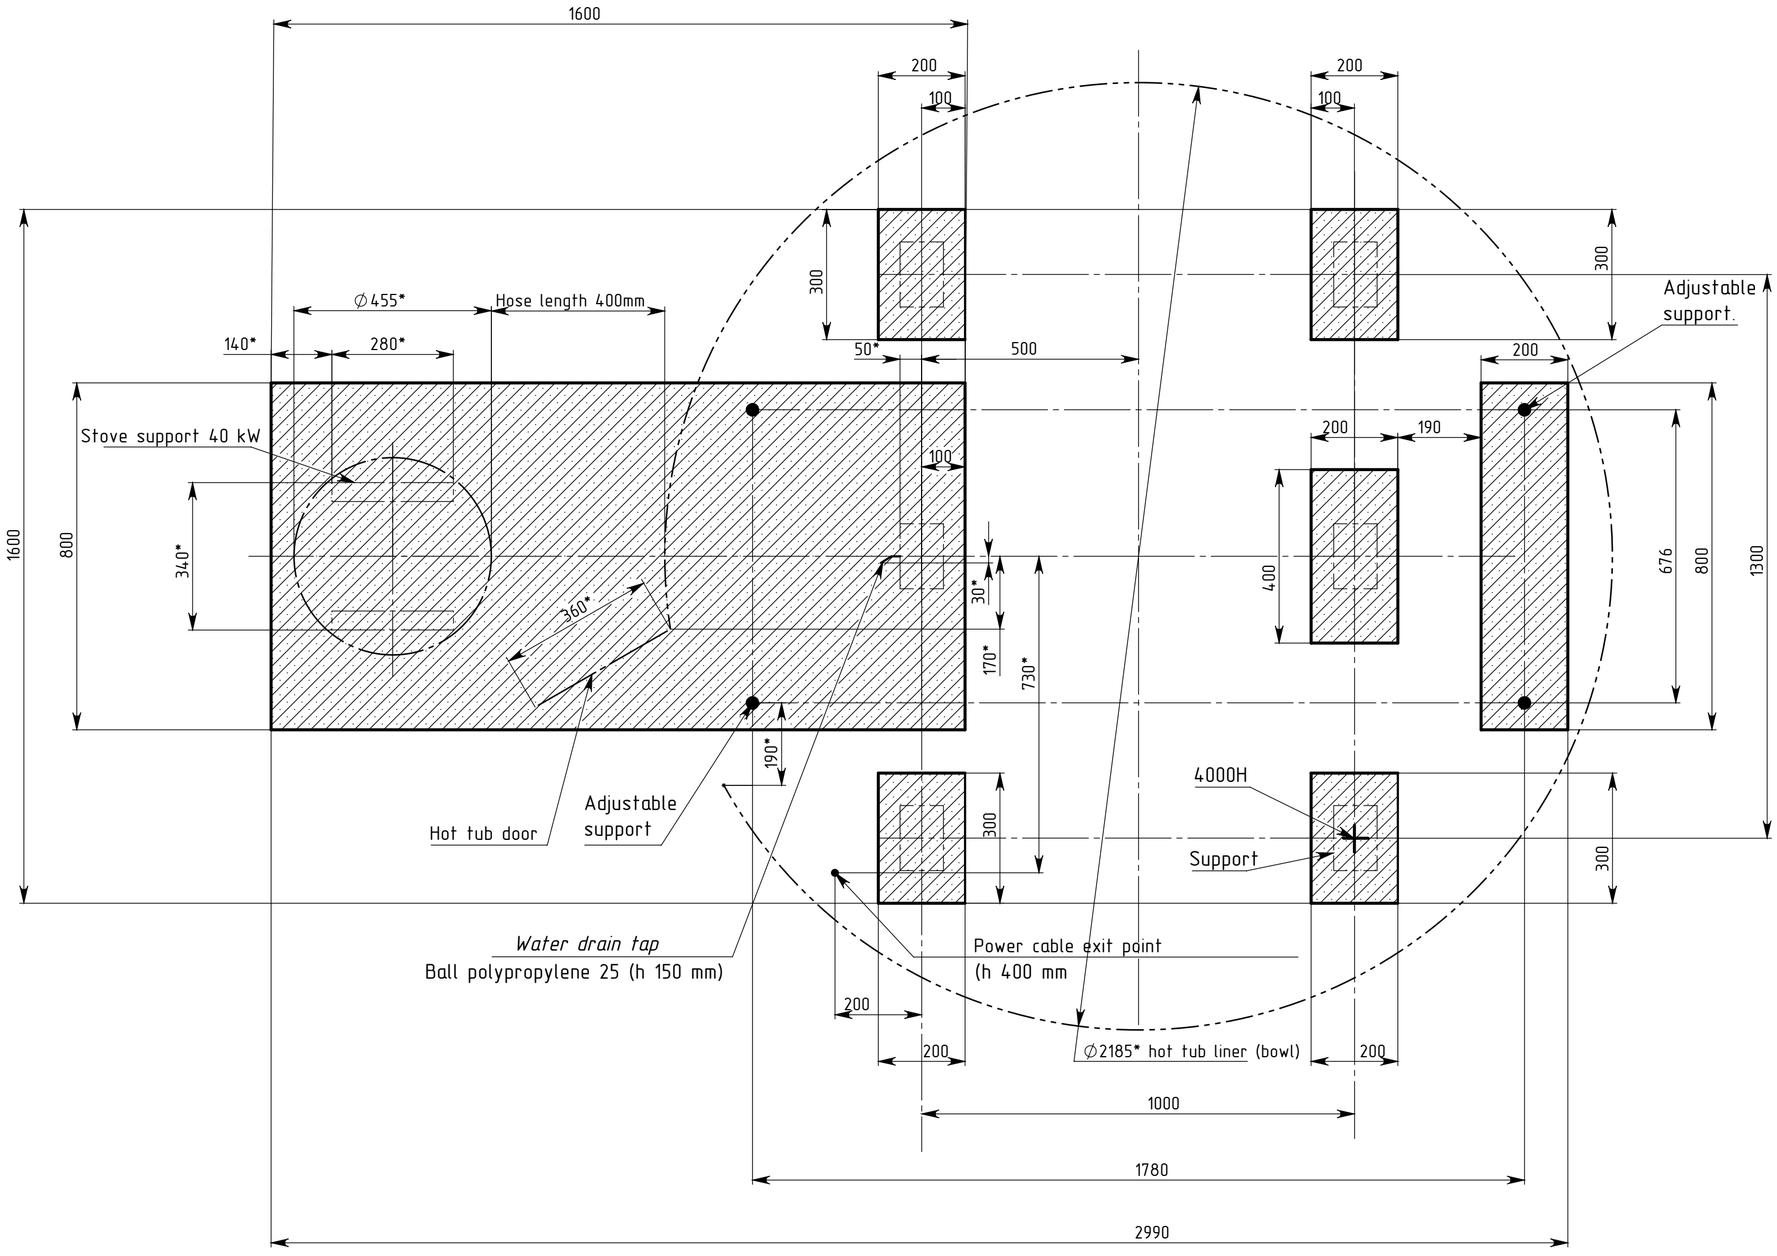

Support load	Weight, kg
Hot tub	250
Water	1650
People	500
General	2400
For 1 support (6 supports)	400

1. **Dimensions for reference.*
2. *Diameter of the drain hole is 37 mm.∅*